


-  Base with vee recess and 1 magnetic flat face. Disengageable of magnet possible. Duralumin articulations.
-  Dovetail clamp with a Ø 8 mm clamping bore
-  0,4 kg
-  Supplied without measuring instrument

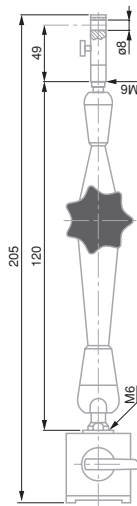

UNIVERSAL SUPPORTS

Magnetic measuring support with suction base or articulated arm.


INTERAPID Magnetic Support with Articulated Arm (small)



Magnetic support with articulated arm

No	=	N	H mm	L mm	Base mm	Consisting of:
01639025		≈ 170	205	120	30 x 30 x 30	– 1 articulated arm length 120 mm – 1 dovetail clamp with fine adjustment – 1 magnetic base 30 x 30 x 30 (L x W x H)

-  Magnetic base has 1 prismatic and 2 flat faces. Articulations made from duralumin. Disengageable permanent magnet. Dovetail clamp with a Ø 8 mm clamping bore.
-  Supplied without measuring instrument

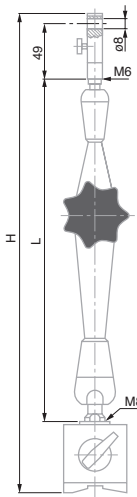

INTERAPID Magnetic Support with Articulated Arm

Simple and secure locking using a single rotating knob
- highly rigid arm and articulation.



Magnetic support with articulated arm

No	=	N	V-Base for Ø, mm	Fine adjust	H mm	L mm	Base mm	Mass kg	Consisting of:
01639022		≈ 800	30 ÷ 150	●	310	200	60 x 50 x 55	1,45	– Articulated arm – Clamp – Magnetic base
01639023		≈ 800	30 ÷ 150	●	390	280	60 x 50 x 55	1,85	– Articulated arm – Clamp – Magnetic base

